

Sourcing products from the top European suppliers, we offer the highest quality locks and compression latches on the market.

We have a large range of Compression Latches, perfect for a huge range of markets. Varying styles and adjustable grip ranges make them easy to fit on any project.

The Vector range has a wide range of options to suit any build. Please note, the options listed in the catalogue are what we hold in our UK stock, as the full option list is extensive. If you are looking for a different option, please contact our team who will be able to offer you the full breakdown of part options.



PCMH




Product	Page No.
Mondial Door Lock	3-01
Lever Handle	3-02
Slimline Compression Latch	3-03a
RT5 Compression Latch	3-03b
Push Button Compression Latch	3-03c
Vector P Handle	3-04
Vector T—Screw Mounted	3-05a
Vector T—Hidden Fix	3-05b
Vector T3—Central Locking	3-05c
Vector T3—Mechanical	3-05d
Wing Knob	3-06

Locks and Latches



Mondial Door Lock

The Mondial Door Lock was designed for use on Motor Homes, meaning it is M1 approved due to its unique design, stopping the lock from opening during transit. It is tamper-proof and simple to fit. The lock can be operated from both the inside and the outside and are available in both left hand and right hand options.

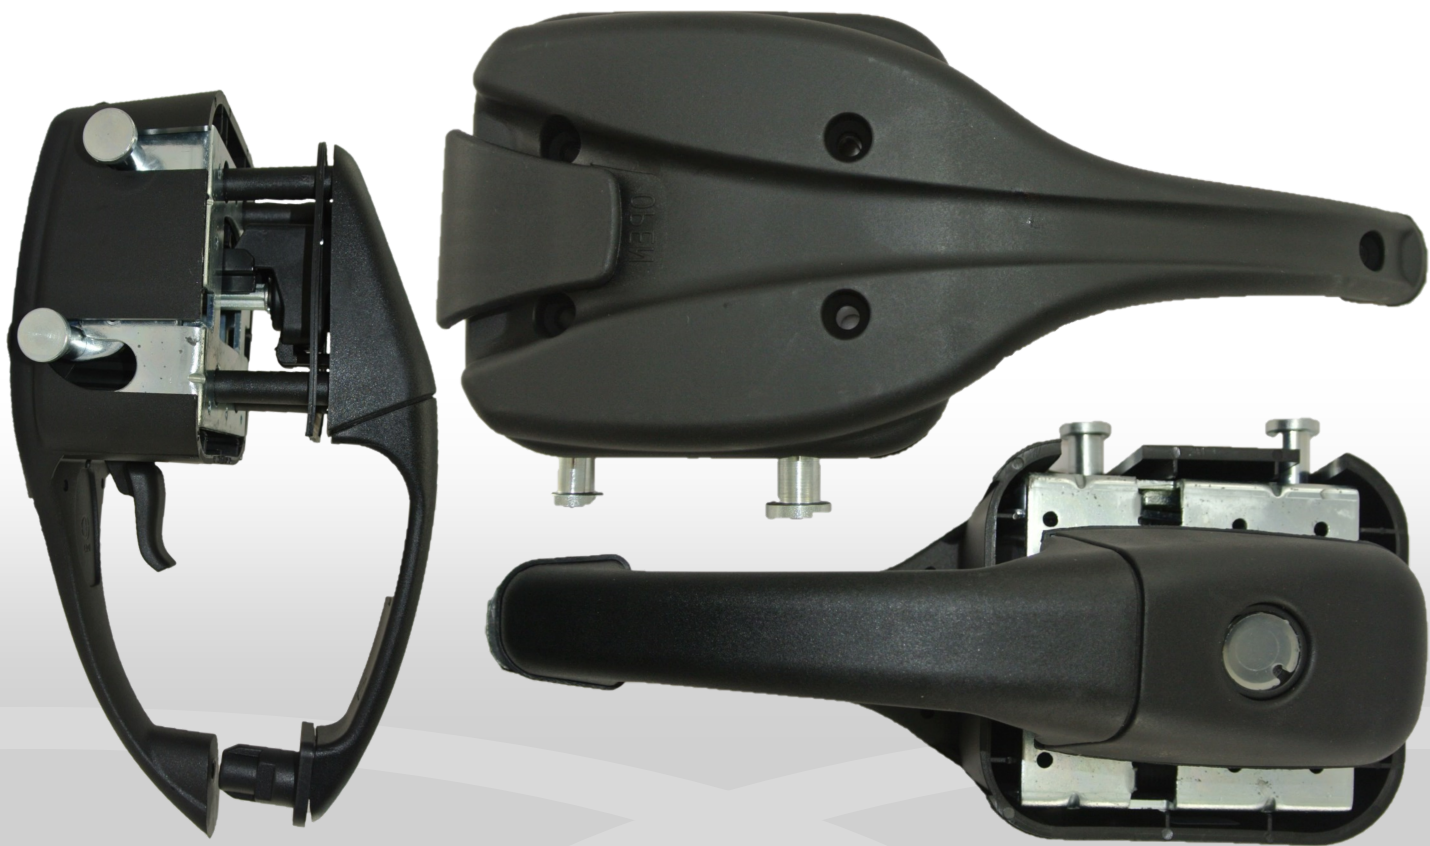

Locks and Latches


Part No.	Product Dimensions
	Mm
Mondial-Left	245 x 105 x 127 (not including bolts)
	245 x 120 x 127 (including bolts)
Mondial-Right	245 x 105 x 127 (not including bolts)
	245 x 120 x 127 (including bolts)





Lever Handle

The black lever handle is a black powder coated latching system. Fitted with a CH751 cylinder and a set of two keys. The Handle requires a four point fix, making application simple and secure.

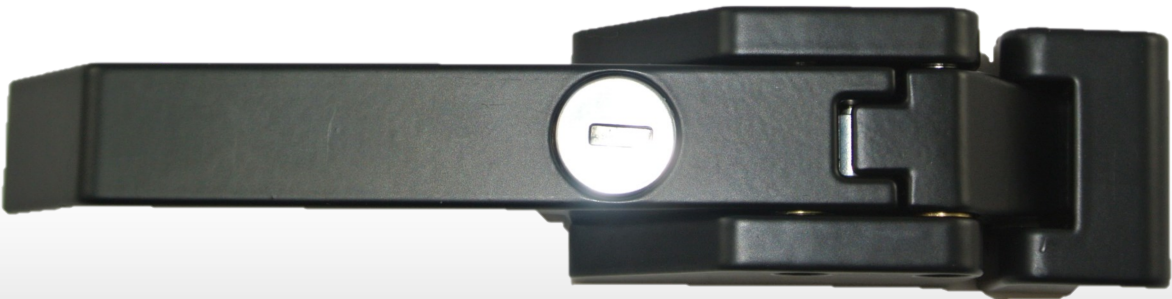

Part No.	Dimension	Colour
	mm	
8-8119-001	155 x 33 x 31	Black Powder Coated


Locks and Latches





Slimline Compression Latch

Flush mounted compression latch with adjustable grip range and supplied with two keys. The latch is also supplied with a mounting bracket for quick and easy assembling into the door. Available in a locking or non-locking option and a standard or extended grip range.

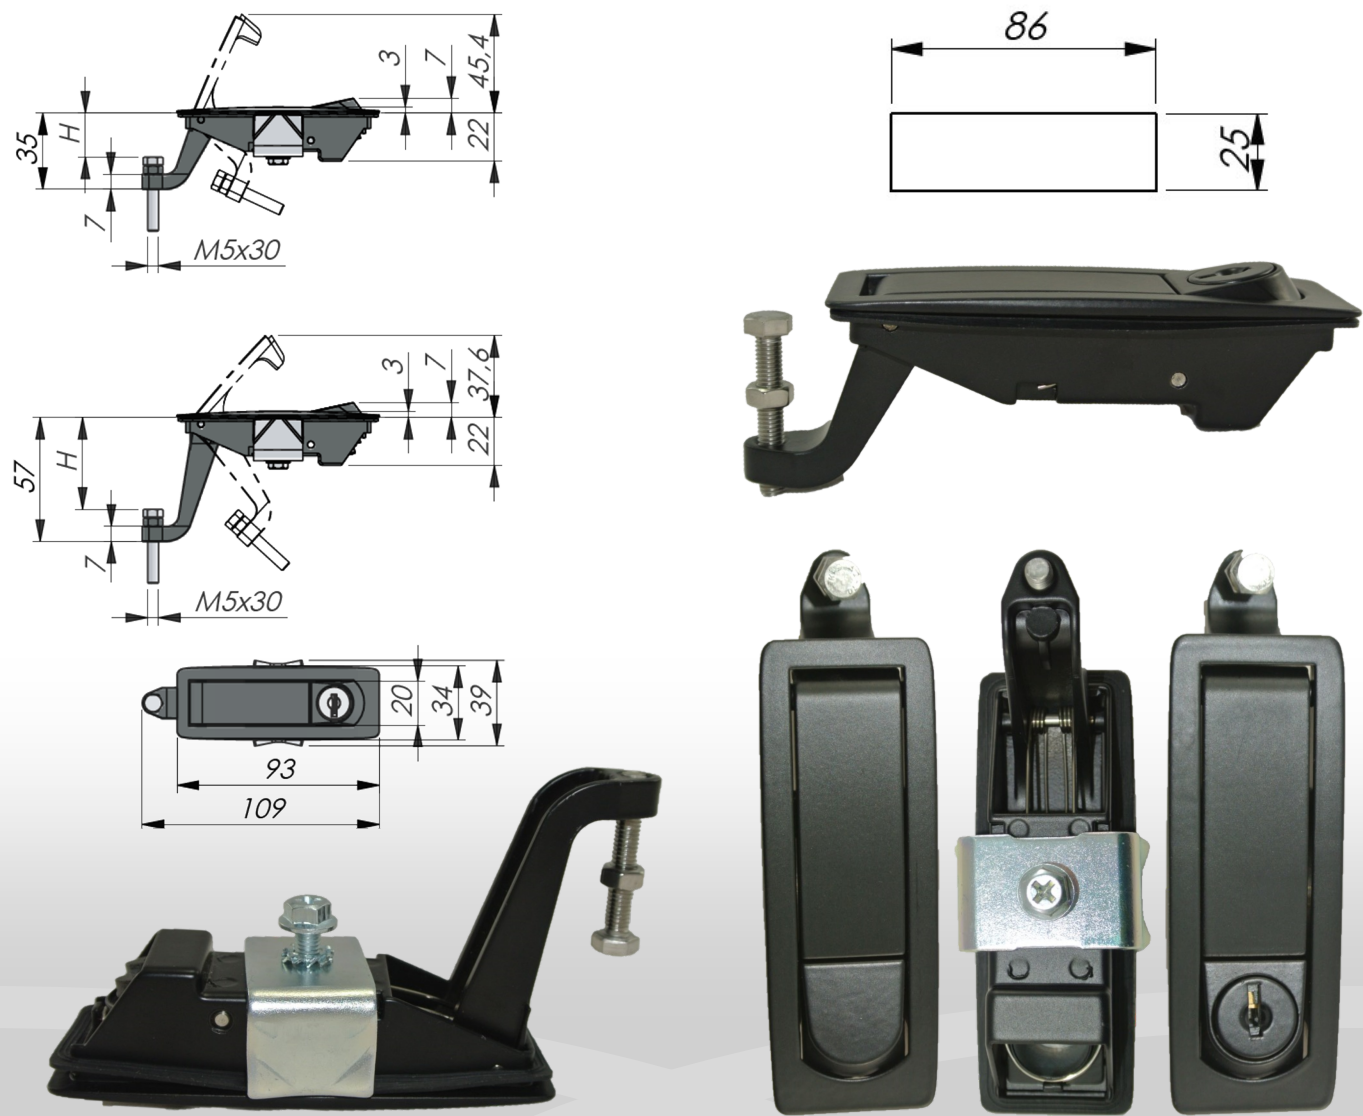

Locks and Latches

Part No.	Description	Grip Range	Cylinder	Opening Rotation	Notes
2814-030009-1124	Slimline Non-Locking Compression Latch	1-24mm	N/A	180°	Zinc die-cast and black
2814-030009-2346	Slimline Non-Locking Compression Latch	23-46mm	N/A	180°	Zinc die-cast and black powder coated
2814-030609-1124	Slimline Locking Compression Latch	1-24mm	CH751	180°	Zinc die-cast and black powder coated
2814-030609-2346	Slimline Locking Compression Latch	23-46mm	CH751	180°	Zinc die-cast and black



RT5 Compression Latch

Flush mounted compression latch with adjustable grip range and supplied with two keys. The latch is also supplied with a mounting bracket for quick and easy assembling into the door.



Part No.	Description	Grip Range	Cylinder	Opening Rotation	Notes
RT5.30-45	Compression Latch	30-45mm	CH751	180°	Zinc die-cast and black powder coated
RT5.45-60	Compression Latch	45-60mm	CH751	180°	Zinc die-cast and black powder coated.

Push Button Compression Latch

Flush mounted compression latch with adjustable grip range and supplied with two keys. The latch is also supplied with a mounting bracket for quick and easy assembling into the door.

Available in multiple key series.




Locks and Latches

Part No.	Description	Grip Range	Cylinder	Housing Material	Notes
2815-505015-1128	Push Button Compression Latch	11-28mm	CH751	PA6	IP65 and PUR gasket to seal against dust and water.
2815-165015-1128	Push Button Compression Latch	11-28mm	CH751	Zinc Die Cast, Black	IP65 and PUR gasket to seal against dust and water.
2815-705005	Dust Cover	N/A	N/A	N/A	For improved dust, water, snow and ice resistance.

Vector P Handle

The Vector Paddle Latch Flush Handle assembles into the door with four mould-in bolts. The rotary latching mechanism engage with the striker in two stages for extra safety, with an optional fixed cam: a spring loaded cam that cannot be moved to the open position accidentally when in a locked position. A machine moulded PUR-gasket will ensure a water– and dust-tight sealing according to IP65.

Comes with a keyed alike 805-cylinder as standard, different key codes available on request.

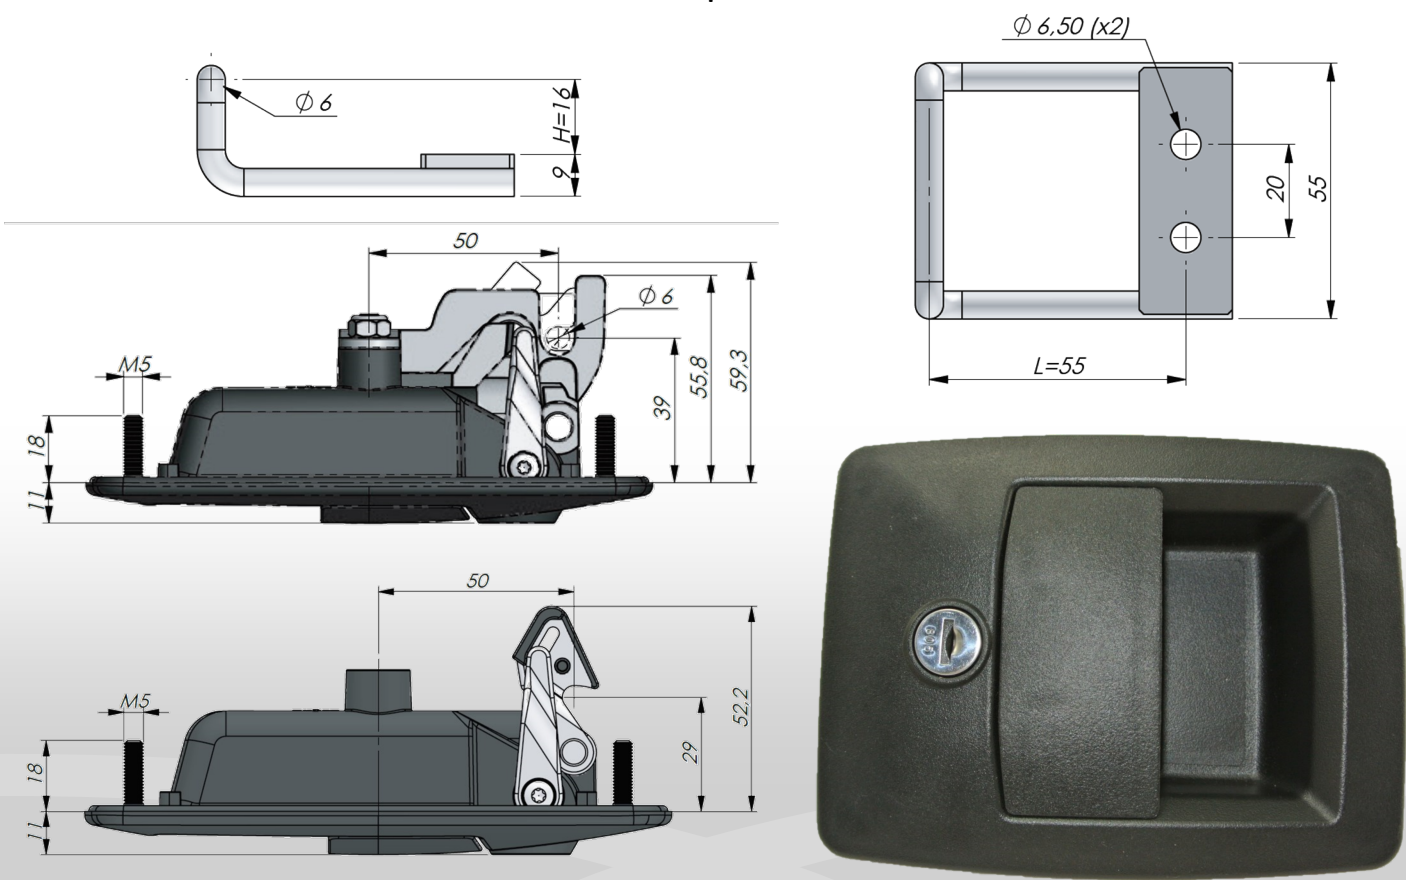

Part No.	Handle	Mounting	Cam	Cylinder Type	Striker	Height	Length
2800-001050-0101	Universal	Mould-In Bolts	Rotary	805	Yes	16mm	55mm
2800-101050-0101	Left	Mould-In Bolts	Rotary	805	Yes	16mm	55mm
2800-201050-0101	Right	Mould-In Bolts	Rotary	805	Yes	16mm	55mm
2800-001020-0101	Universal	Mould-In Bolts	Fixed Cam	805	Yes	16mm	55mm
2800-101020-0101	Left	Mould-In Bolts	Fixed Cam	805	Yes	16mm	55mm
2800-201020-0101	Right	Mould-In Bolts	Fixed Cam	805	Yes	16mm	55mm




More options available for order. Please see the Industrilas Catalogue for a full break down of all Vector T Handle Options.



Vector T Handle

Adjustable Cam—Screw Mounted

The standard Flush T-Handle with 4mm compression stroke, mounting with a 4-point screw fix, provides a tight seal. The Vector T Handle features two independent locking systems: key-locking cylinder and retractable padlock loop (Ø8mm). Made with a strong plastic base and option of a black powder-coated or stainless steel T-Handle

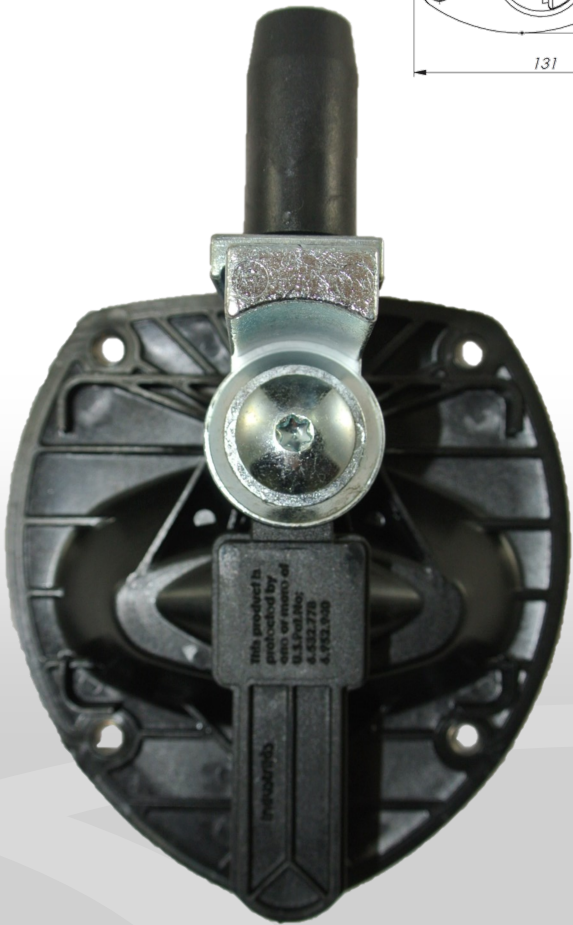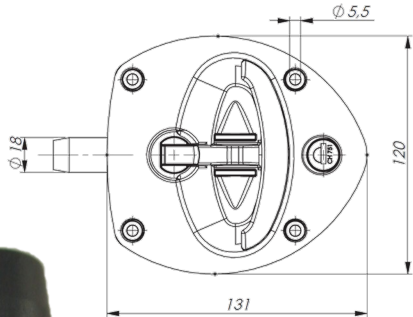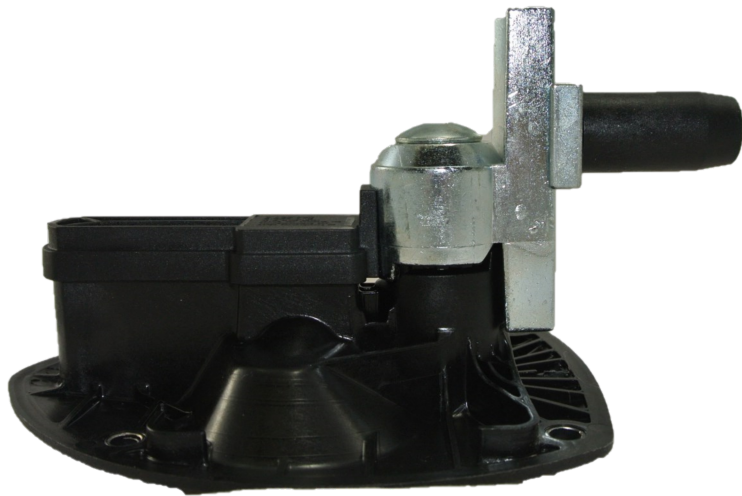

Locks and Latches

Part No.	Fixing	Handle / Shaft	Cylinder	Opening Rotation	Cam	Height	Length
272021-06-S1	Screw or Rivet Mounting	Zinc / Zinc	Keyed Alike (751)	180°	Adjustable single point roller cam	10-60mm	61mm
273921-06-S1	Screw or Rivet Mounting	Stainless Steel 304 / 303	Keyed Alike (751)	180°	Adjustable single point roller cam	10-60mm	61mm
272021-02-S1	Screw or Rivet Mounting	Zinc / Steel	Keyed to Differ	180°	Adjustable single point roller cam	10-60mm	61mm


More options available for order. Please request the Industrilas Catalogue for a full break down of all Vector T Handle Options.



Vector T Handle

Adjustable Cam—Hidden Fix

The high specification Flush T-Handle with 4mm compression stroke, assembles into the door with four mould-in bolts. The Vector T Handle features two independent locking systems: key-locking cylinder covered with a dust cover, and retractable padlock loop (Ø8mm). A machine moulded PUR-gasket will ensure a water- and dust-tight sealing according to IP65.

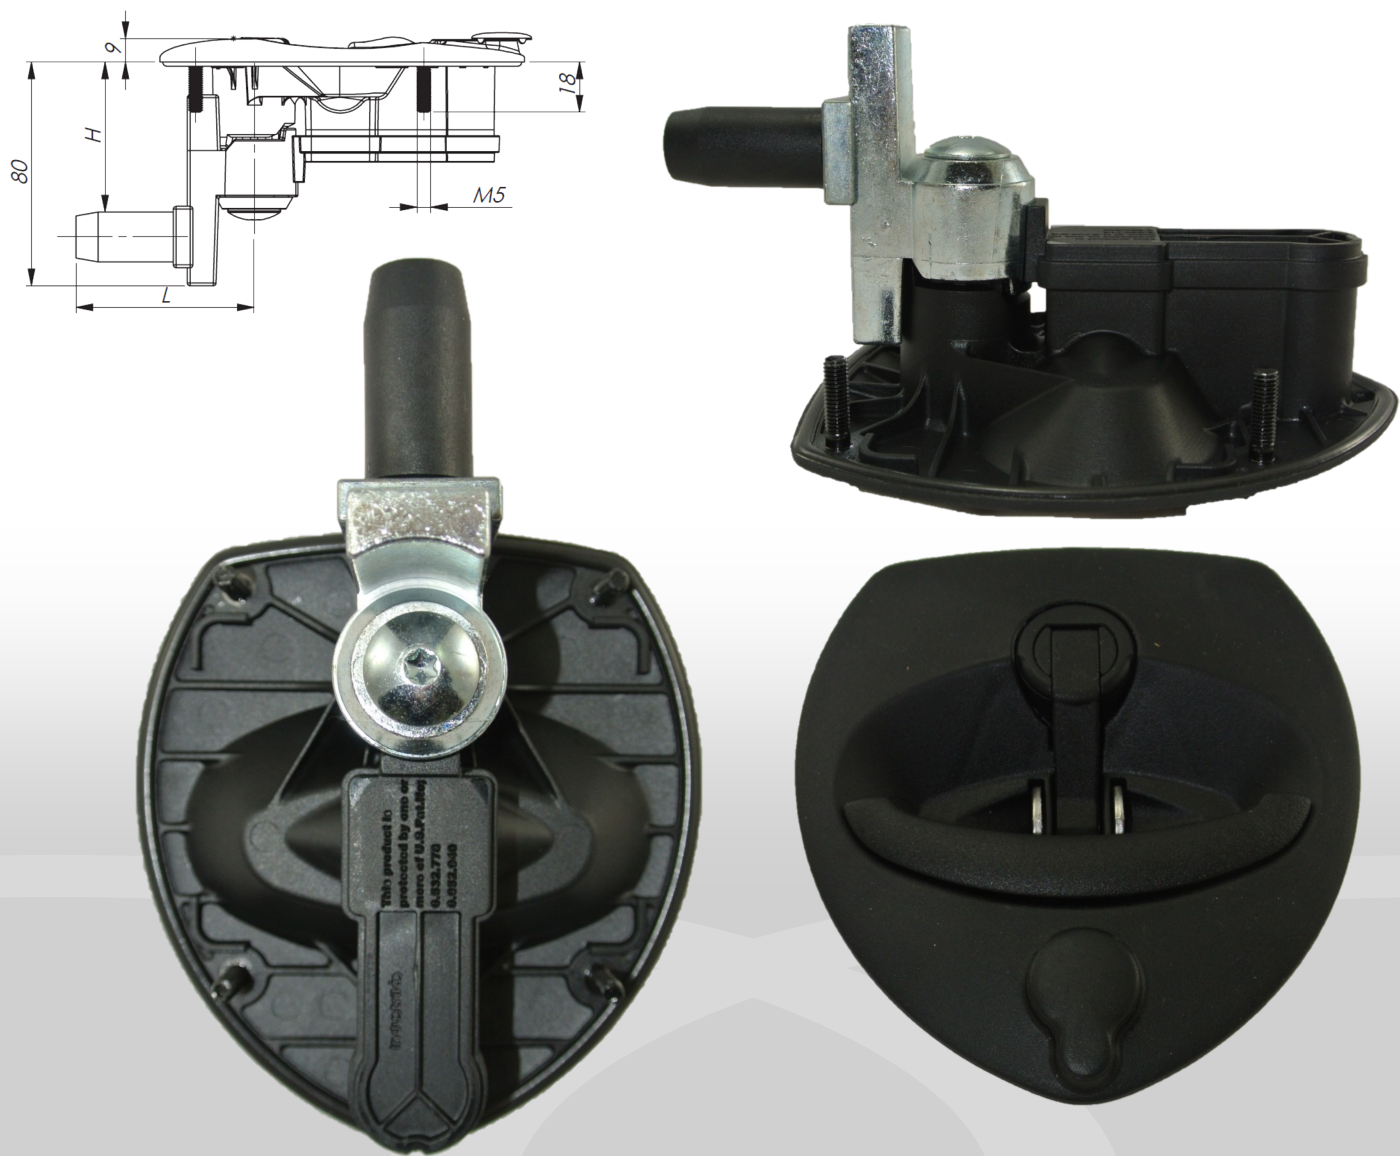

Part No.	Fixing	Handle / Shaft	Cylinder	Opening Rotation	Cam	Height	Length
272063-68-S1	Cast-In Bolts	Zinc / Zinc	Keyed Alike (805)	180°	Adjustable single point cam	10-60mm	61mm
272063-69-S1	Cast-In Bolts	Zinc / Zinc	Keyed Alike (810)	180°	Adjustable single	10-60mm	61mm

More options available for order. Please request the Industrilas Catalogue for a full break down of all Vector T Handle Options.



Vector T3 Handle

Central Locking—Hidden Fix

The unlock and lock signal is sent from the vehicle’s system. Available in versions with feedback if the T-bar handle is open or closed and if the handle is unlocked or locked.

The handle creates a 4mm compression and is sealed to IP65 for water and dust. Four blind-mount studs ensure waterproof assembly. In case of power failure, the latch is equipped with a mechanical override cylinder.

Available for 12– and 24-volt systems and with fixed or adjustable roller cams, as well as 1-, 2– and 3-point latching options.

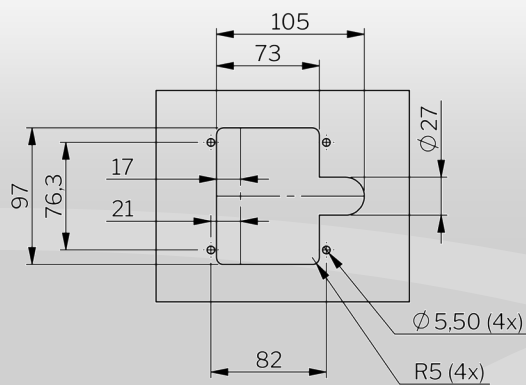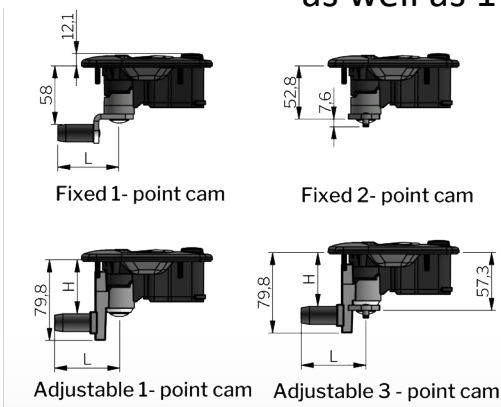

Part No.	Fixing	Handle / Shaft	Cylinder	Opening Rotation	Cam	Height	Length
2752-30626000-05	Cast-In Bolts	Black Powder Coated Zinc / Steel	Keyed Alike 751	180°	Adjustable Single Point Roller Cam	10-61mm	61mm
2752-36836010-05	Cast-In Bolts	Black Powder Coated SS304 / SS303	Keyed Alike 805	180°	Adjustable Single Point Roller Cam	10-61mm	61mm


Locks and Latches

Vector T3 Handle

Mechanical

Flush compression Vector 3 T-handle with 4 mm compression stroke. Sealed to IP65 against water and dust. Four blind-mount studs and PUR-gasket ensure waterproof assembly.

Available with fixed or adjustable roller cams, as well as 1-, 2- and 3-point latching options. Vector T3 comes in zinc or stainless steel. The zinc version offers a handle with the turning pivot shaft in zinc with a cast-in-steel shaft for excellent strength. The stainless steel version with T-handle and pivot shaft in bright polished stainless steel is recommended for applications used in tough environments. Available with or without the turnable dust cover.

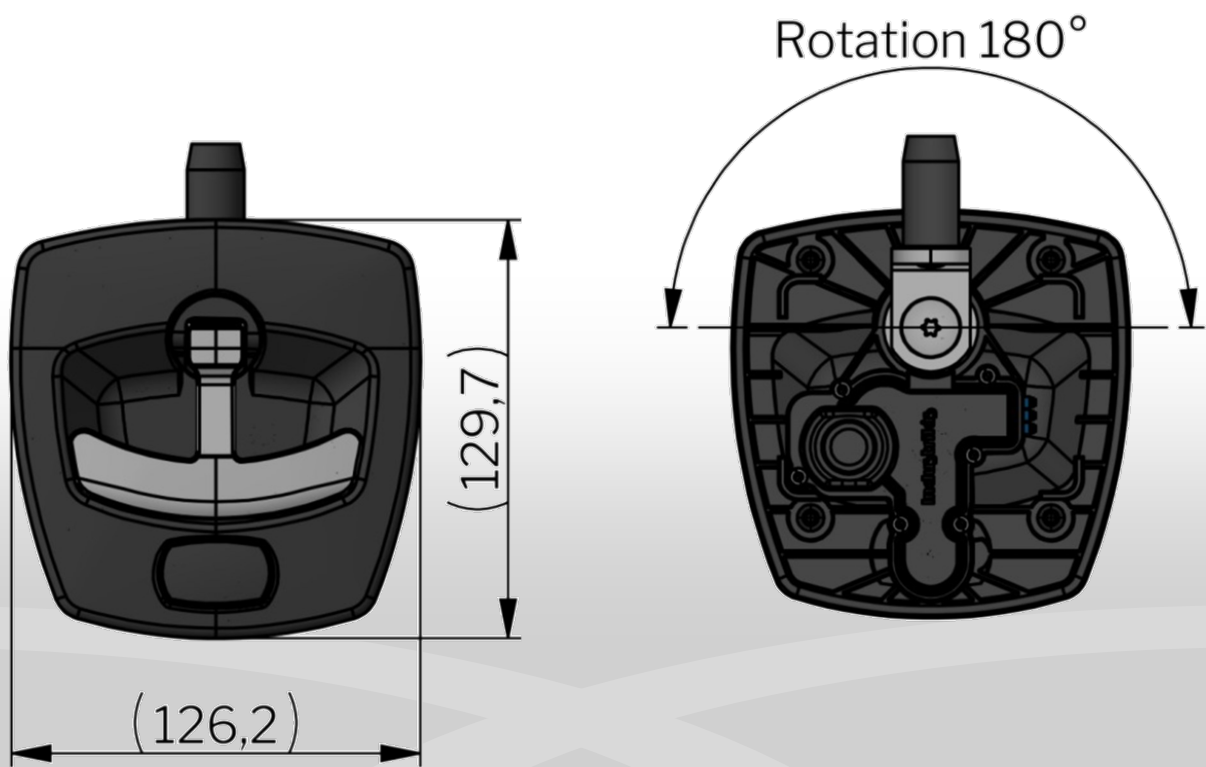


Part No.	Fixing	Handle / Shaft	Cylinder	Opening Rotation	Cam		
					Fixing	Height	Length
2752-10626100-05	Cast-In Bolts	Black Powder Coated Zinc / Steel	Keyed Alike 751	180°	Adjustable Single Point Roller Cam	10-61mm	61mm
2752-16836110-05	Cast-In Bolts	Black Powder Coated SS304 / SS303	Keyed Alike 805	180°	Adjustable Single Point Roller Cam	10-61mm	61mm

Locks and Latches

More options available for order. Please request the Industrilas Catalogue for a full break down of all Vector T Handle Options.

Wing Knob


Quarter-turn wing knob in locking or non-locking version. Ergonomic design enables a firm grip when opening and the knob has a universal clockwise or counter-clockwise rotation when opening or closing. The key can be removed in both the open and locked position. Supplied with nut and two keys. Protection degree IP65.

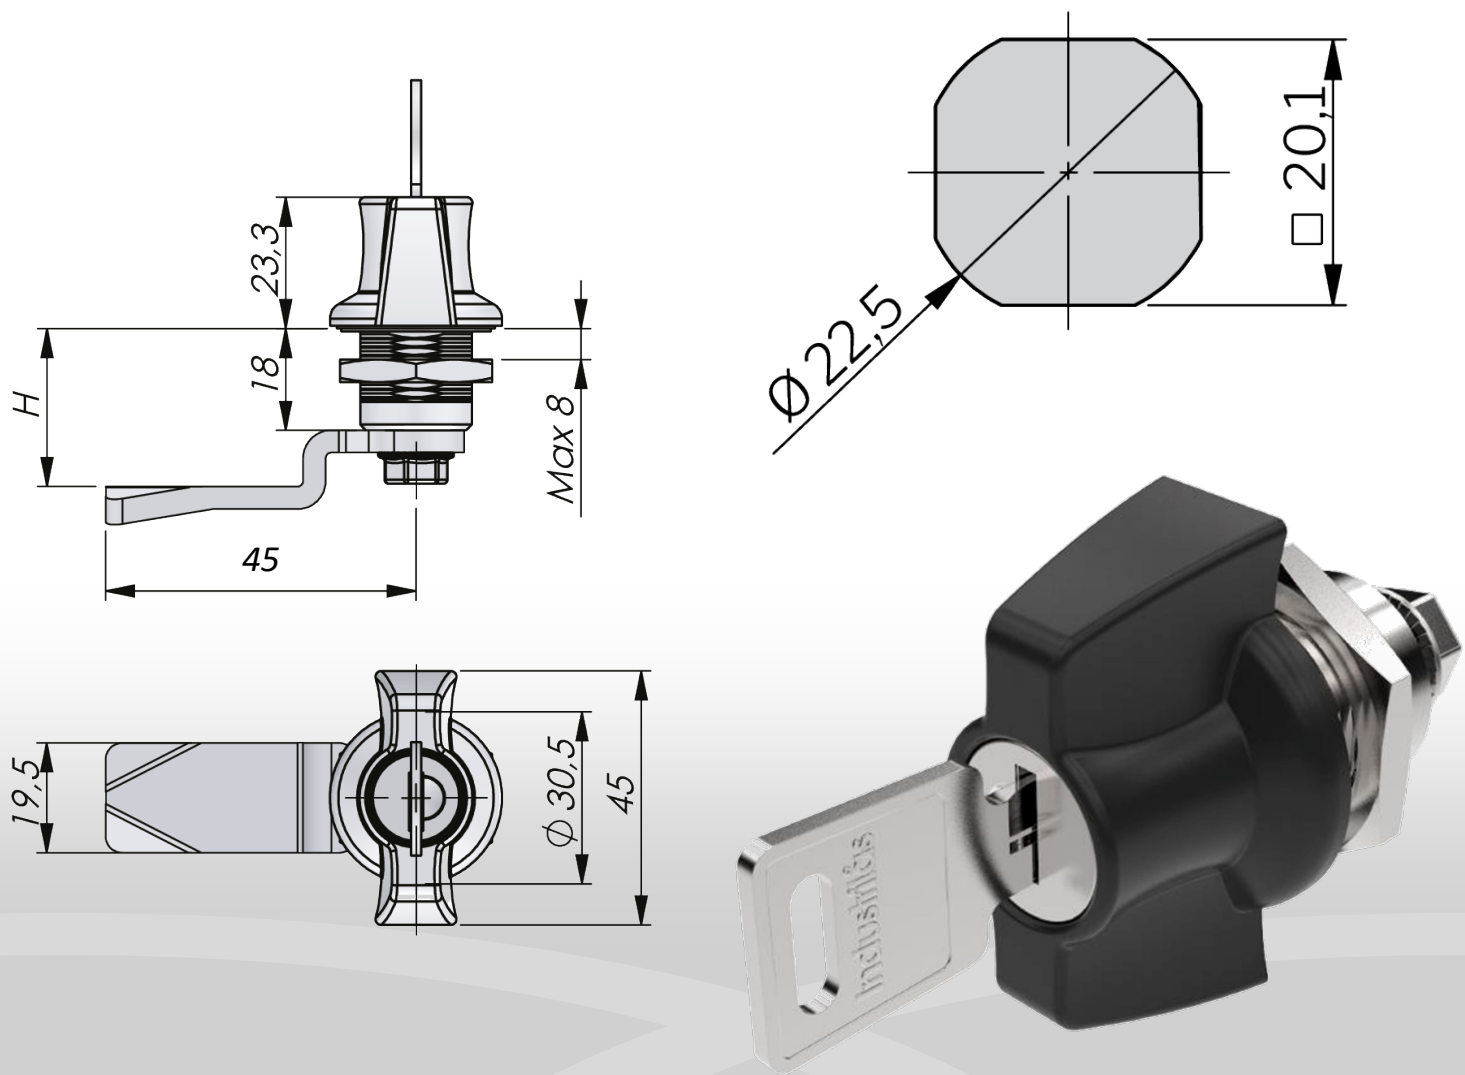

Locks and Latches

Part No.	Housing Length	Material	Cylinder	H Dimension	Cam Length
8-4620-4	18mm	Black Powder Coated Zinc	Keyed Alike IL101	14mm	45mm
8-4620-7	18mm	Black Powder Coated Zinc	Keyed Alike IL101	8mm	45mm
241642-1-0000	18mm	Black Powder Coated Zinc	Keyed Alike IL101	No Cam	45mm

More options available for order. Please request the Industrilas Catalogue for a full break down of all Vector T Handle Options.



Locks and Latches