

# VISION INSIDE



Vision Inside latching system is installed inside the sealed area and provides smooth compression and latching. IP65 when used with a Vision Swing Handle. Multiple latching points is to be used for adequate sealing in higher applications.

Control mechanism can be equipped with additional standard cam together with adapter for centre latching point. The control mechanism is delivered assembled with flat rod and latching points are ordered separately.

System with more than four latching points is available.



## MATERIAL

**Control mechanism:** Zinc die cast, zinc plated, special surface treatment (passes 30 day salt-spray test according to ISO 9227, equivalent to ASTM B 117) or glass fibre reinforced polyamide (PA6GF30)

**Rod:** Steel, zinc plated or stainless steel 316

## RELATED PRODUCTS


**Handles:** 1-004.04, 1-004.05, 1-006.01, 1-002.02, 1-005.10, 1-006.50, 1-002.01, 6-010, 1-002.03, 1-006.03, 1-002.08, 1-007

**Rods:** 1-008.05/13

**Accessories:** 1-008.13

**Needed components for a complete system:** 1-008.13

Use the Index Code at [industrilas.com](http://industrilas.com)

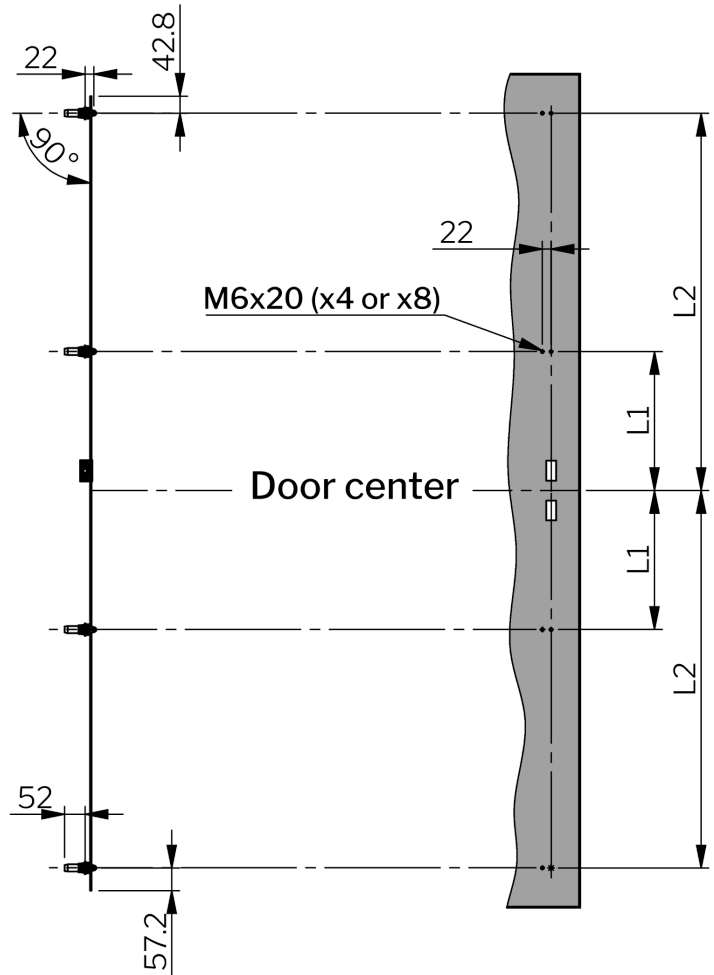

**Make your selections in each column to create your article number (AAAA-BBBB-CCCC)**

AAAA	Material rod	Material control mechanism	BBBB	Rod system	CCCC	L in mm	L1 in mm	L2 in mm
1321	Steel, zinc plated	Zinc, zinc plated	1000	Vision Inside + Vision Outside	0500	500	200	-
1390	SS 316	Zinc, Delta seal			0900	700	300	-
1350	Steel, zinc plated	PA6GF30			1200	1500	400	-
1395	SS 316	PA6GF30			982	982	300	700
					1700	1700	300	800

