


# VISION SWING HANDLE STANDARD FOR 40 MM PROFILE CYLINDER



Low profile swing handle for 40 mm profile cylinder and control mechanism. Available in turn-to-latch version where the door is locked by turning the key.

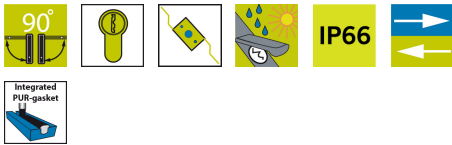


**MATERIAL**  
**Dish:** Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)  
**Dust cover:** TPE  
**Handle:** Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)  
**Pivot shaft:** Zinc die cast, zinc plated

**RELATED PRODUCTS**  
**Similar products:** 1-002.02, 1-002.12  
**Rod latch systems:** 1-008.04, 1-008.21, 1-008.25, 1-008.57, 1-002.01, 1-008.07  
**Cylinders:** 1-209, 1-210, 1-211  
**Other materials:** 6-010  
 Use the Index Code at [industrilas.com](http://industrilas.com)

**TECHNICAL INFORMATION**  
**Cutout:** Version C  
 The dust cover adds 4.5 mm.

**Standards:** IP66, NEMA 4

**Integrated PUR-gasket**

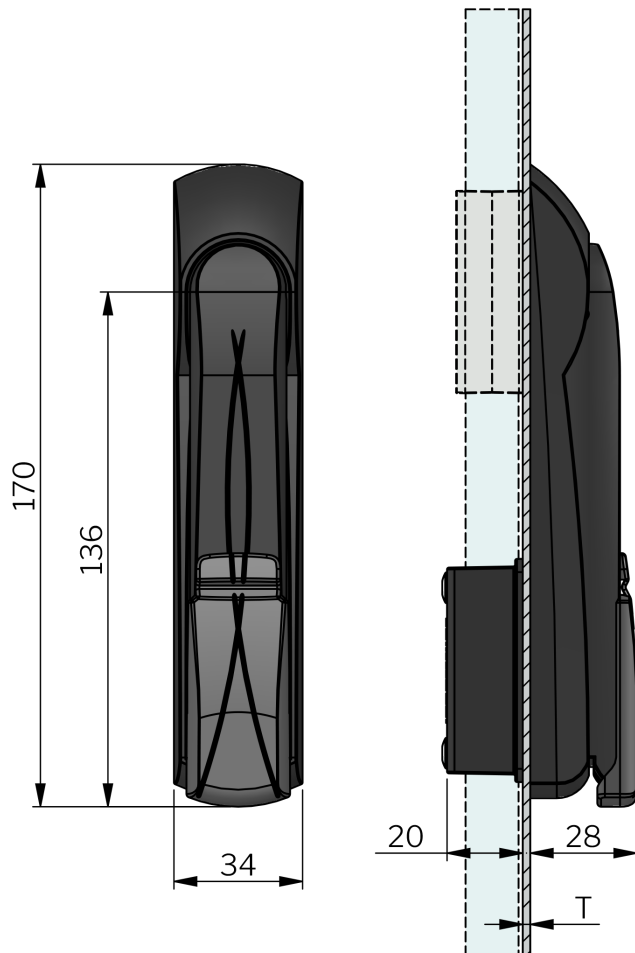

**Make your selections in each column to create your article number (AAAAAAABC-DDDD)**

AAAAAAA	Material	B	Door thickness T	C	PDL	DDDD	Dust cover
1216118	Handle zinc / dish PA6	1	0,8 - 1,5 mm	0	No	C60D	Yes
1216418	Handle zinc / dish zinc	2	1,6 - 2,5 mm			C60U	No
1250118	Handle PA6 / dish PA6	3	2,6 - 3,5 mm				

PDL = Spring loaded padlock loop retracts when handle is released.

Version C

