


# VISION SWING HANDLE STANDARD FOR BESTLOCK CYLINDER



Low profile swing handle for Best cylinder and control mechanism. Available in turn-to-latch version where the door is locked by turning the key.

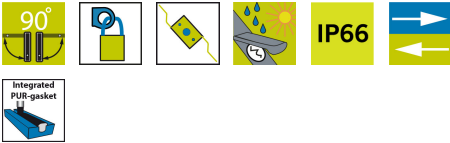

## MATERIAL

- Dish:** Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
- Handle:** Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
- Padlock loop:** Stainless steel 304
- Pivot shaft:** Zinc die cast, zinc plated


## RELATED PRODUCTS

- Rod latch systems:** 1-008.04, 1-008.21, 1-008.25, 1-008.07
- Similar products:** 1-002.18
- Use the Index Code at [industrilas.com](http://industrilas.com)

## TECHNICAL INFORMATION

- Cutout:** Version C
- Without dust cover: Handle height = 23 mm (X)
- With dust cover: Handle height = 28 mm (X)

- Standards:** IP66, NEMA 4

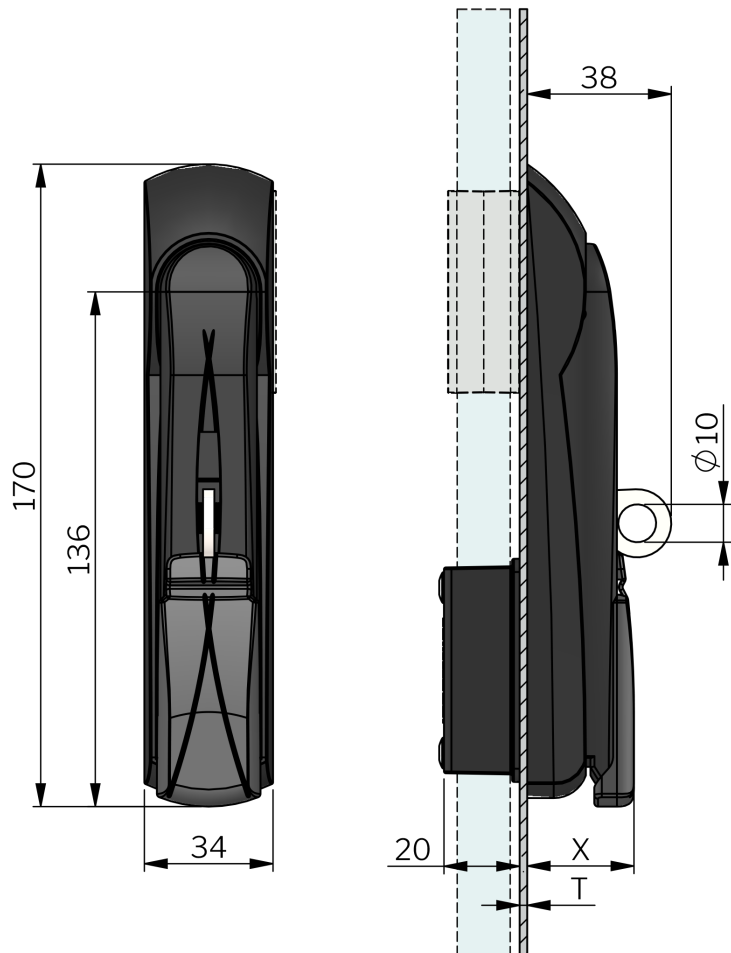

**Make your selections in each column to create your article number (AAAAAAABC-DDDD)**

AAAAAAA	Material	B	Door thickness T	C	PDL	DDDD	Dust cover
1216118	Handle zinc / dish PA6	1	0,8 - 1,5 mm	1	Yes	C70U	No
1216418	Handle zinc / dish zinc	2	1,6 - 2,5 mm			C70D	Yes
		3	2,6 - 3,5 mm				

PDL = Spring loaded padlock loop retracts when handle is released.

Version C

