



# CONCEALED LIFT OFF CLICK HINGE STANDARD 120°

Concealed hinge with a patented function that enables the door part to be engaged to, or separated from the frame part with a "click".

Easy door assembly by placing the door in the frame parts and then closing the door. The door part and frame part snap together. Secure the hinge by latching the red safety cam.

The frame part is mounted with screws and the door part is mounted on weld-on studs. Universal right and left mounting. Opening angle 120°.



## MATERIAL

### Safety catch:

**Door part:** Zinc die cast, zinc plated

**Frame part:** Steel, zinc plated

**Pin:** Stainless steel 303

**Safety cam:** Glass fibre reinforced Polyamide (PA6GF30)

**Washer:** Brass



## RELATED PRODUCTS

**Similar products:** 3-091, 3-096, 3-090, 3-095

Use the Index Code at [industrilas.com](http://industrilas.com)

## TECHNICAL INFORMATION

**Standards:** DIN EN 61373

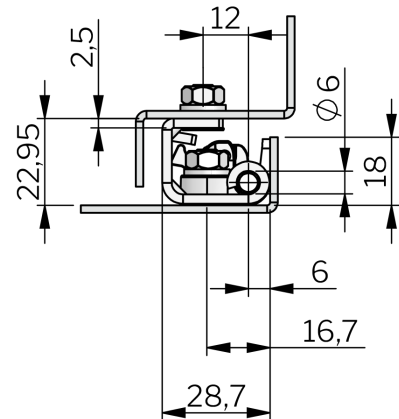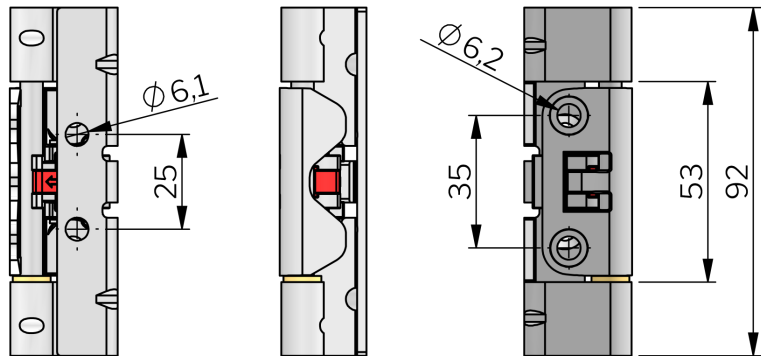

P/N	Description	Hole spacing
311117	Standard	40 mm
312121	Standard	25 mm

**Industrilas**  
— When access counts —

