



CONCEALED LIFT OFF CLICK HINGE HIGHLANDER 120°

Concealed hinge with a patented function that enables the door part to be engaged to, or separated from the frame part with a "click".

Easy door assembly by placing the door in the frame parts and close. The door part and frame part snap together. Secure the hinge by latching the red safety cam.

Screw mounted frame part. The door part is mounted on weld-on studs. Universal right and left mounting. Opening angle 120°.



MATERIAL

Door part: Zinc die cast, special surface treatment (Passes 30 day salt-spray test according to ISO 9227, equivalent to ASTM B 117.)

Frame part: Stainless steel 304

Pin: Stainless steel 303

Safety cam: Glass fibre reinforced Polyamide (PA6GF30)

Washer: Brass


RELATED PRODUCTS

Similar products: 3-094, 3-096, 3-090, 3-091

Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Standards: DIN EN 61373

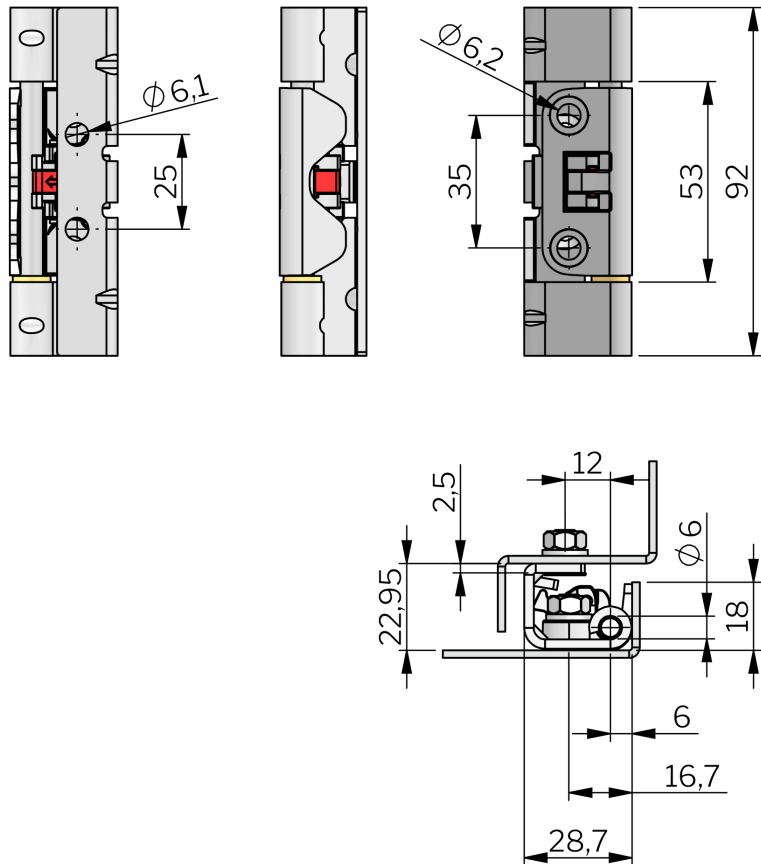

Industrilas
— When access counts —

P/N	Description	Hole spacing
311417	Highlander	40 mm
313021	Highlander	25 mm

