



Flush mounted compression latch sealed against water and dust. The latch has adjustable grip range 11-61 mm and is suitable for door thickness up to 7 mm. Available with keyed to differ or keyed alike cylinders. Key codes for keyed to differ and key code CH751 is stamped on the cylinder barrel dust cap. Other key codes are only shown on the inside of the latch.

Delivered with mounting bracket for quick and easy assembling. PUR-gasket and Orings ensure IP66 water and dust protection.















MATERIAL

Latching arm inside sealed area: Zinc die

cast, zinc plated **Gaskets:** EPDM

Handle: Zinc die cast, black texture powder

coated

Housing: Glass fibre reinforced Polyamide (PA6GF30) or zinc die cast, E-coat and black

texture powder coated

Mounting bracket: Glass fibre reinforced

Polyamide (PA6GF30) Nut: Steel, zinc plated Pin: Stainless steel 303 Screw: Steel, zinc plated

O-ring: NBR

Push button: Glass fibre reinforced polyamide (PA6GF30)

RELATED PRODUCTS


Similar products: 2-396, 2-397 Accessories: 2-398, 281570-007000 Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Key extraction: Open / Closed Standards: IP66, DIN EN 61373

Optional 3 mm flat gasket when mounting latch on structured surfaces, such as

"diamond plate" etc.

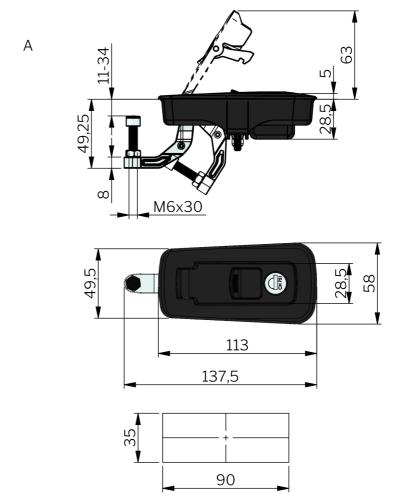



INDUSTRILAS.COM

Make your selections in each column to create your article number (AAAA-BBCDDE-HHHH)

AAAA Type	BB Housing material	Surface C treatment	DD Cylinder	E Assembly	HHHH Cam	Cam max	Drawing
2815 Compression latch	Zinc die 16 cast, black 50 PA6	handle Black texture powder coated	01 Keyed alike CH751	P 1P66 - assembled	1128 11 3461 34	34 61	A B
			02 Keyed alike CH752	2	3401 34	O1	
			03 Keyed to differ				
			04 Keyed alike IL753	Ż			
			05 Keyed alike	Ż			
			06 Keyed alike	Ş			
			07 Keyed alike	2			
			21 Keyed alike	Ş			
			23 Keyed alike	Ż			
			25 Keyed alike	Ż			
			27 Keyed alike	Ż			
			29 Keyed alike	ý			
			31 Keyed alike	ę			
			33 Keyed alike	ę			
			35 Keyed alike	Ş			
			37 Keyed alike	Ş			
			39 Keyed alike				

