

VISION SWING HANDLE COMPACT TOOL OPERATED



Low profile compact swing handle for cam, with tool operated insert. Available in push-to-latch version where the spring-loaded cam latches when the handle is pushed in. Suitable for door thickness: 0.8–3.5 mm.



MATERIAL



Dish: Glass fibre reinforced polyamide (PA6GF30)
Handle: Zinc die cast, black powder coated
Insert: Zinc die cast, chrome plated
Pivot shaft: Zinc die cast, zinc plated

RELATED PRODUCTS

Cams: 1-008.51, 2-480
Rods: 2-540, 2-541, 2-545
Keys: 2-372, 2-370
Rod guides: 2-560, 2-570
Rod adapters: 2-541
Similar products: 1-006.03
 Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Cutout: Version B
Standards: IP66, NEMA 4

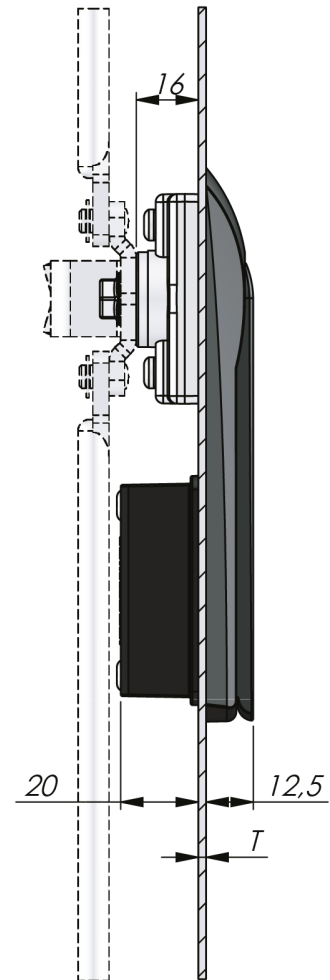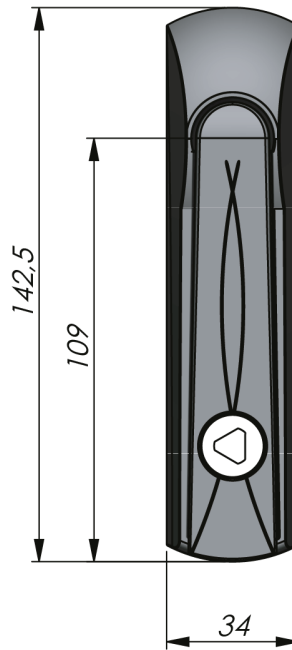

Make your selections in each column to create your article number (AAAAAABCD-EEEEF)

AAAAAA Material	B Opening rotation	C Door thickness T	D PDL	EEEE Insert	F Model	
141611 Handle zink / dish PA6	1 90° clockwise or counter-clockwise	1 0,8 - 1,5 mm	0 No	1301 Hexagon 11	1 Push-to-latch	
		2 1,6 - 2,5 mm		1308 Square 7		
		3 2,6 - 3,5 mm		1309 Square 8		
	2 90° counter-clockwise			1312 Triangular 7		
				1313 Triangular 8		
				1316 Double Bit 3		
				1317 Double Bit 5		
				1347 Recessed hex 8 / 3 mm pin		
3 90° clockwise						

PDL = Spring loaded padlock loop retracts when handle is released.

Version B

