



# DOBRADIÇA OCULTA LIFT OFF CLICK 120°

Dobradiça oculta com função patenteada de encaixe e remoção do quadro num simples "Click".

Montagem fácil da porta no quadro, bastando encaixar e girar para fechar que estará automaticamente travada. A fixação da parte da porta na parte do quadro é feita pela trava e segurança vermelha.

A parte do quadro é aparafusada e a parte da porta é fixa em parafusos soldados (Studs). Sentido de abertura universal esq./dir. Ângulo de abertura 120°.



## MATERIAL

### Safety catch:

**Door part:** Glass fibre reinforced polyamid (PA6GF30)

**Frame part:** Zinc die cast, zinc plated or black coated

**Pin:** Brass, nickel plated

**Safety cam:** Glass fibre reinforced Polyamid (PA6GF30), black

**Washer:** Brass, nickel plated





## RELATED PRODUCTS

**Similar products:** 3-091, 3-096, 3-090, 3-095

Use the Index Code at [industrilas.com](http://industrilas.com)

## TESTS & STANDARDS

**Classifications:** DIN EN 61373

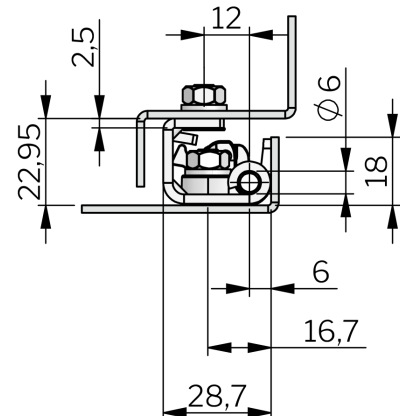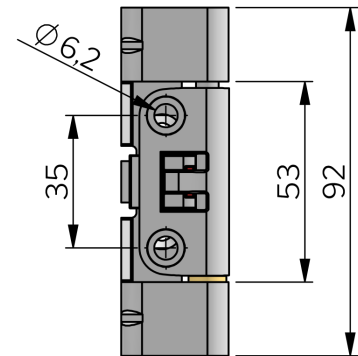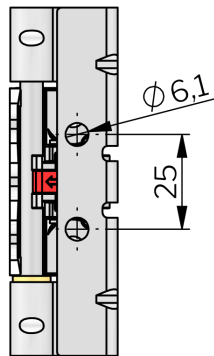

**Industrilas**  
— When access counts —

P/N	Descrição	Hole spacing
311117	Padrão	40 mm
312121	Padrão	25 mm

