

VISION INSIDE



Vision Inside latching system is installed inside the sealed area and provides smooth compression and latching. IP65 when used with a Vision Swing Handle. Multiple latching points is to be used for adequate sealing in higher applications. Control mechanism can be equipped with additional standard cam together with adapter for centre latching point. The control mechanism is delivered assembled with flat rod and latching points are ordered separately. System with more than four latching points is available.



MATERIAL

Control mechanism: Zinc die cast, zinc plated, special surface treatment (passes 30 day salt-spray test according to ISO 9227, equivalent to ASTM B 117) or glass fibre reinforced polyamide (PA6GF30)

Rod: Steel, zinc plated or stainless steel 316

RELATED PRODUCTS

Needed components for a complete system:


1-008.13

Cams: 2-481

Accessories: 1-008.13

Handles: 1-002.02, 1-005.10, 1-006.50, 1-002.01, 6-010, 1-002.03, 1-004.03, 1-006.01, 1-006.03, 1-007, 1-002.08

Use the Index Code at industrilas.com

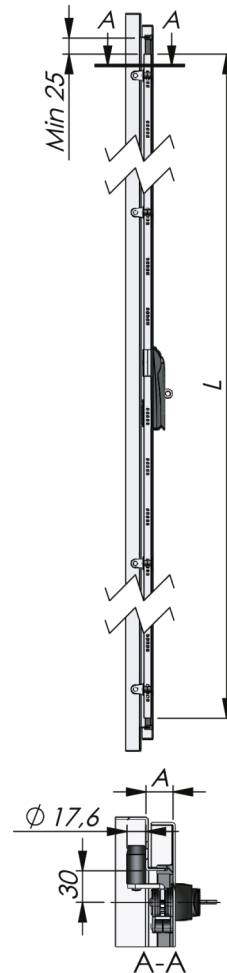

Industrilas

— When access counts —

A product number is created by combining the figures in each column (AAAA-BCCC-DDDD)