


VISION SWING HANDLE STANDARD FOR 45 MM PROFILE CYLINDER



Low profile swing handle for 45 mm profile cylinder and control mechanism. The door is locked by turning the key.

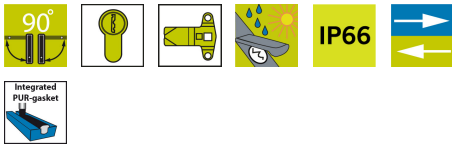

MATERIAL


Dish: Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
Dust cover: TPE
Handle: Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
Pivot shaft: Zinc die cast, zinc plated

RELATED PRODUCTS

Rod latch systems: 1-008.04, 1-008.21, 1-008.25, 1-008.07
Cylinders: 1-209, 1-210, 1-211
Other materials: 6-010
Similar products: 1-002.02, 1-002.12
 Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Cutout: Version C
 The dust cover adds 4.5 mm.
Standards: IP66, NEMA 4

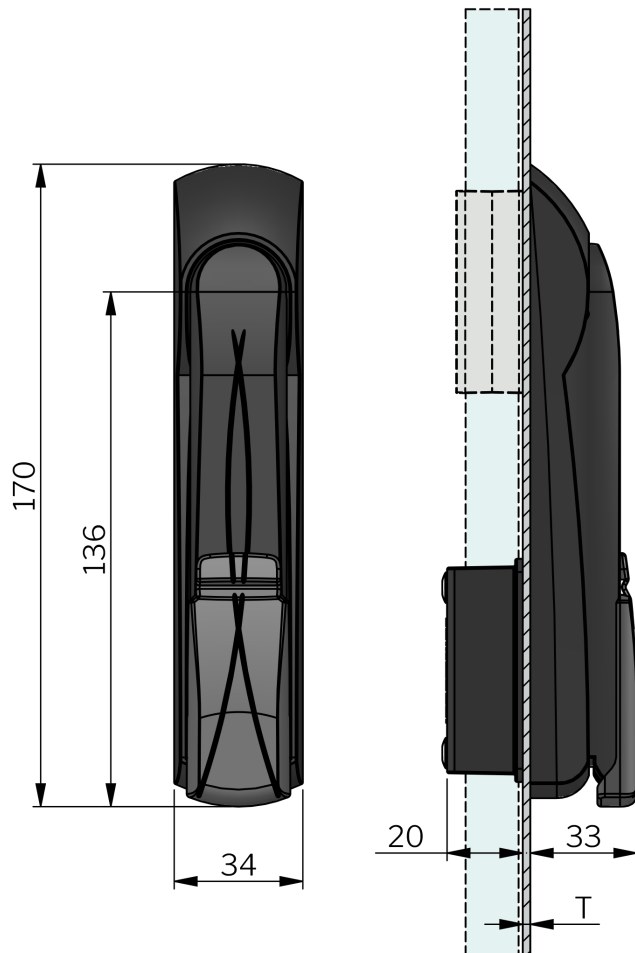

Make your selections in each column to create your article number (AAAAAAABC-DDDD)

| AAAAAAA | Material | B | Door thickness T | C | PDL | DDDD | Dust cover |
|---------|-------------------------|---|------------------|---|-----|------|------------|
| 1216118 | Handle zinc / dish PA6 | 1 | 0,8 - 1,5 mm | 0 | No | C65U | No |
| 1216418 | Handle zinc / dish zinc | 2 | 1,6 - 2,5 mm | | | C65D | Yes |
| | | 3 | 2,6 - 3,5 mm | | | | |

PDL = Spring loaded padlock loop retracts when handle is released.

Version C

